


SUFFIX ABBREVIATIONS

STREET -ST
 AVENUE-AVE
 LANE-LN
 CIRCLE-CIR
 BOULEVARD-BLVD
 DRIVE-DR
 PLACE-PL

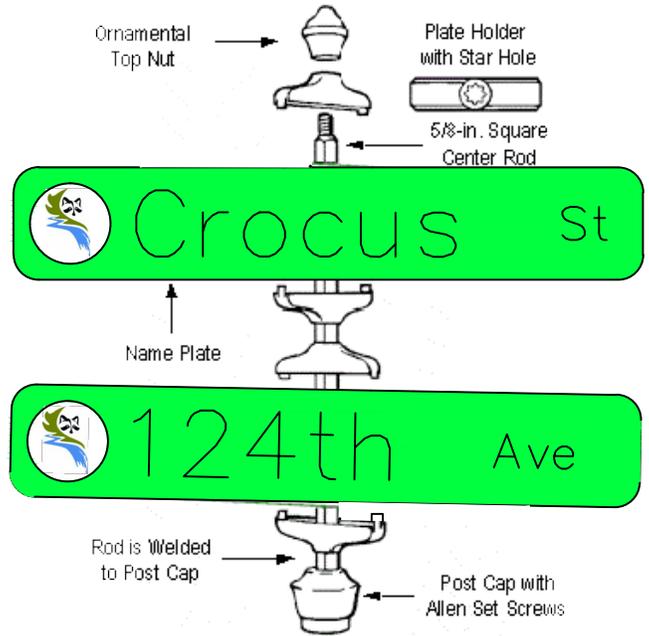

THIS PICTURE IS FOR BLADE MOUNTING ONLY, SEE LEFT, NOTES BELOW AND CITY SPECIFICATIONS FOR BLADE & LETTERING REQUIREMENTS.

NOTES:

1. SIGN BLADE SIZE IS 9" FOR 40 MPH AND LESS, 12" FOR 45 MPH AND GREATER, ARE MADE OUT OF .080" THICK ALUMINUM AND HAVE ROUNDED CORNERS.
2. BLADE LENGTH SHALL BE 24" MIN. OR AS NECESSARY TO FIT NAME AND LOGO.
3. BLADES SHALL BE SINGLE FACED AND FASTENED TOGETHER WITH STAINLESS STEEL BOLTS WITH NYLON INSERT LOCK NUTS.
4. LETTER SIZE IS 6" UPPER CASE & 4.5" LOWER CASE FOR STREET NAME ON 9" BLADES, 8" UPPER CASE & 6" LOWER CASE FOR STREET NAME ON 12" BLADES, 3" UPPER CASE & 2.5" LOWER CASE FOR SUFFIX ON 9" & 12" BLADES.
5. THE FONT TO USE FOR LETTERING IS SERIES C HIGHWAY GOTHIC.
6. WHITE DIAMOND GRADE SHEETING, MNDOT GREEN BACKGROUND FOR PUBLIC STREETS MNDOT BLUE BACKGROUND FOR PRIVATE STREETS, EC FILM OVERLAY WITH LOGO AND NO BORDER.
7. THE CITY LOGO WILL PRECEDE THE STREET NAME ON BLADE.
8. STREET NAMES SHALL BE SPELLED COMPLETELY EXCEPT FOR SUFFIXES.
9. SIGN BRACKETS SHALL BE LYLE SIGNS NO. E-450.
10. SIGN POST SHALL BE 2 3/8" O.D. X 12' LONG GALVANIZED ROUND TUBE AND INSTALLED WITH BREAKAWAY SLEEVE IN CONCRETE.
11. A SIGN PLAN SHOWING SIGN COLORS, SIZES AND LETTERING MUST BE SUBMITTED TO THE CITY FOR REVIEW AND APPROVAL.
12. SEE CITY SPECIFICATIONS FOR MORE DETAILS ON MATERIALS AND LAYOUT.

STREET SIGN INSTALLATION

DRAWN: R.L.S.

DATE: 1/28/2016

SCALE: NONE

PLATE NO.